



ATS SPECIALIZED CONTRACTING GROUP Ltd.

COMPANY PROFILE

Specialized Solutions. Proven Results.



**Four specialized services.
One dependable contracting partner.**

Alberta & Ontario

Calgary · Toronto · Greater Toronto Area (GTA)

403-305-6864 | info@ats-scg.com | ats-scg.com

OUR COMPANY

Specialized expertise. Dependable execution.

ATS Specialized Contracting Group Ltd. provides grading, utility trenching, cutting, coring, scanning, breaking, removal and firestopping services across Alberta and Ontario.

Registered in both provinces, we carry **\$5 million in liability insurance**, with **WCB coverage in Alberta and WSIB coverage in Ontario**. We prioritize safety through job-specific hazard assessments, appropriate protective equipment and coordination with site safety requirements.

01 Grading & Utility Trenching

Site preparation, rough & laser-guided fine grading, power raking, utility trenching, backfilling & compaction.

02 Cutting, Coring & Scanning

Concrete & asphalt sawing, coring, GPR scanning, trench cutting and removal, plus related installations.

03 Breaking & Removal

Concrete & asphalt breaking, selective removal, loading, hauling & disposal.

04 Firestopping

Firestopping for service penetrations, rated wall & floor openings, and construction joints.

SAFETY IN EVERY SCOPE

We plan each task around site conditions, identified hazards and the requirements of the work.

Serving Calgary and Alberta; Toronto, the GTA and other Ontario projects by arrangement.

DIVISION 01

Grading & Utility Trenching

Site preparation, laser-guided fine grading, power raking, utility trenching and compaction.



Power raking and driveway surface preparation



Laser-guided fine grading and elevation checks



Driveway surface compaction

- Rough grading and laser-guided fine grading.
- Power raking, soil conditioning and gravel driveway restoration.
- Topsoil and aggregate placement; driveway shaping and drainage profiles.
- Utility trench excavation, bedding preparation and spoil removal.
- Backfilling, compaction and restoration preparation.

DIVISION 02

Cutting, Coring & Scanning

Concrete & asphalt floor sawing, wall sawing and trench cutting.



Before cutting: marked floor



After cutting: opened trenches



Rail-mounted wall sawing



Asphalt floor sawing



Concrete barrier cutting

- Concrete and asphalt floor sawing; concrete wall sawing.
- Concrete trench cutting for mechanical, electrical and plumbing routes.
- Green cutting and control joints.

Independent electricity and water supply available for cutting and drilling.

DIVISION 02 / CORING & SCANNING

Concrete Coring & GPR Scanning


Concrete scanning and precision coring for planned service openings.



Wall coring in progress



GPR scanning of concrete

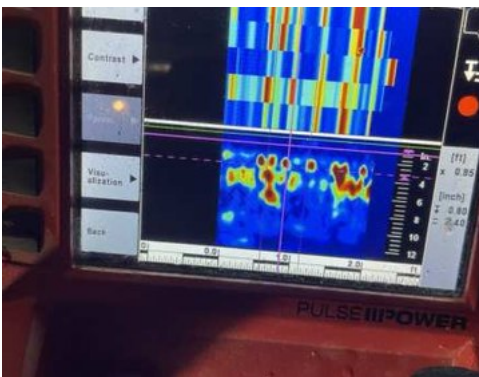

GPR scan display

Plan the opening.

GPR scanning supports the review of reinforcement and embedded features before planned cutting or drilling.

- Concrete coring for mechanical, electrical and plumbing openings.
- Scanning to help identify reinforcement and embedded services.
- Coordinated scanning, drilling and cutting for defined project scopes.

DIVISION 02 / ANCHORING & BOLLARDS

Anchoring & Bollard Installation

Coring through concrete columns and rock footings, rebar anchoring and bollard installation.

SUNDANCE CANYON TRAIL / BANFF, ALBERTA

Coring through concrete columns and rock footings, with rebar anchoring using Hilti RE 500 adhesive for bridge installation.



Concrete & Rock Coring



Drilled anchor holes



Rebar anchoring


BOLLARD INSTALLATION



01 / Preparation



02 / Cored opening

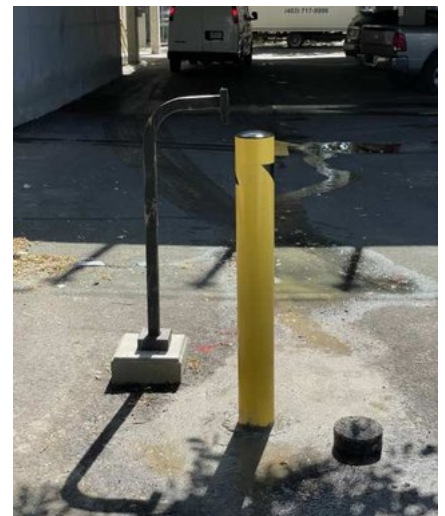

03 / Installed bollard

DIVISION 02 / WINDOWS & DOORS

Egress Window & Door Installation


Concrete opening preparation, cutting, removal, and window and door installation.



01 / Window opening cutting



02 / Concrete section removed

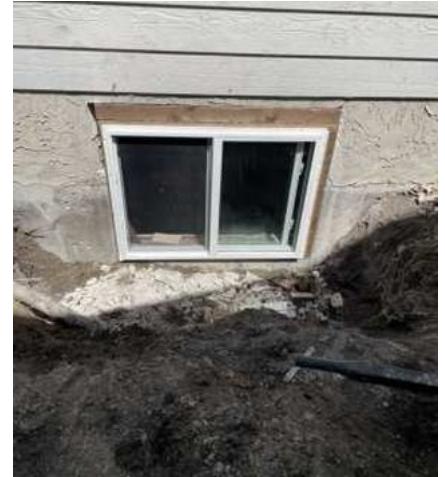

03 / Window installed

DOOR OPENING WORK



Cutting the foundation opening



Door installed - work in progress

From concrete opening preparation to window and door installation, the work is coordinated around the agreed project scope.

DIVISION 03

Breaking & Removal

Concrete and asphalt breaking, selective removal, loading, hauling and disposal.



Concrete breaking



Excavator access for removal



Concrete trench removal



Removed concrete loaded for hauling

- Concrete and asphalt breaking; selective removal.
- Material handling, loading, hauling and disposal.
- Trench access, cleanup and preparation for subsequent work.

DIVISION 04

Firestopping

Firestopping for service penetrations, rated openings and construction joints.



Multiple service penetrations through a floor



Tray penetration



Pipe penetration collars



Cable tray penetration

Approved applicator for HILTI and STI

- Firestop installation for pipe, cable and other service penetrations.
- Rated wall and floor openings, and construction joints.
- Installation coordinated with specified systems and assemblies.
- New construction, renovation and retrofit scopes.



Let's discuss your project.

SEND US THE DETAILS

Project address and required service

Drawings or photos, dimensions and approximate quantities

Access conditions and preferred schedule

\$5 million liability insurance coverage

ATS Specialized Contracting Group Ltd.

Ahmad Tebou | President

403-305-6864

info@ats-scg.com

www.ats-scg.com

Alberta & Ontario

Calgary • Toronto • Greater Toronto Area (GTA)